

PROPERTIES



IP67

Water splash protection
Dust protection, 2m drop protection



Sensors*

Methane, propane, CO, O₂, H₂S,
CO₂

Adjustment/Calibration

Directly on the device
or via test station

Operating time *

Up to 50 hours



Rechargeable battery*

Rechargeable battery changeable,
battery box



Intuitive operation



Data transfer

IR



Data memory

Special probe accessories




OLLI



APPLICATION



0-1 bar*
0-0,1 MPa*

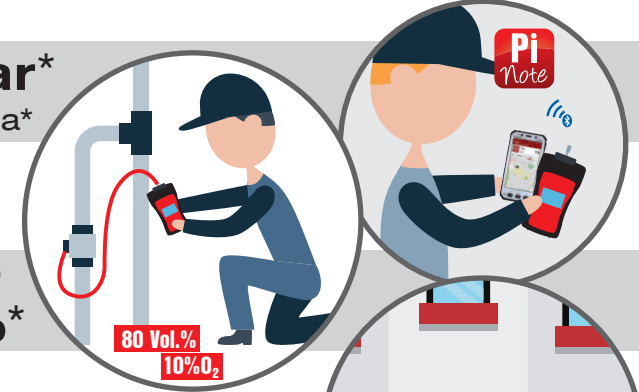

**0-100
Vol.%***

**0-100
%LEL***

50 ppm

0-1.000 ppm*

* Not all features are available for all countries.
Availability of features is subject to device
configuration and national regulations.
status 10/2018